




QDE SERIES DIRECTIONAL BALL VALVES

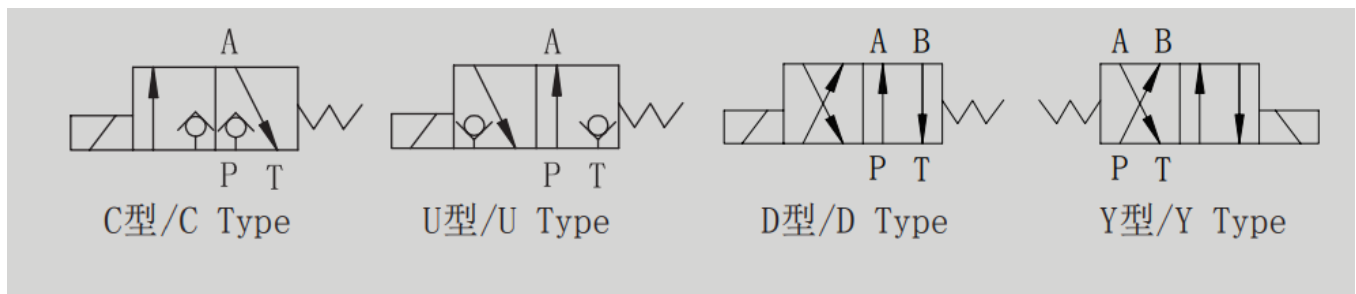

QDE series are solenoid are solenoid operated poppet valves, they are used to control the start ,stop and direction of flow.

Size	6U	6C	6D	6Y	10U	10C	10D	10Y
Rated flow(L/min)	16	16	12	12	30	24	30	24
Operating pressure(Mpa)	31.5							
Weight(KG S)	1.2	1.2	1.2	1.2	2.8	2.8	2.8	2.8
Valve body (Material) Surface treatment	Steel Body Surface Black Oxide							
Oil cleanliness	NAS1638 class 9 and ISO4406 class 20/18/15							

Subplate Installation dimensions

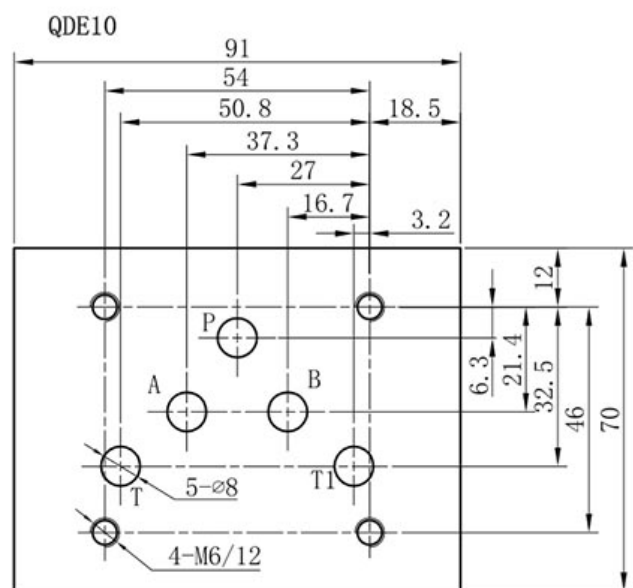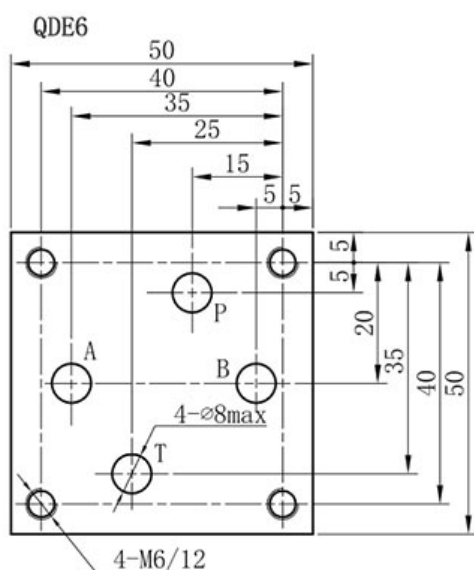

M	3	QDE	6	U	20	315	DC24	N	Z5L	P	B0.8
---	---	-----	---	---	----	-----	------	---	-----	---	------

矿物质液压油
Mineral
hydraulic oil

3=三油口 4=四油口
3=3 actuator ports
4=4 actuator ports

型号
Model

通径 6; 10
Size 6; 10

U=二位三通常开, C=二位三通常闭
D=二位四通; Y=二位四通
U=2/3 way normally open
C=2/3 way normally closed
D=2/4 way; Y=2/4 way

系列号
Series number

工作压力
Operating pressure

电压 Voltage
DC12;DC24 ;AC110;AC220

N=有故障检查按钮;无=没有故障检查按钮
N=With concealed manual override
No Code =Without concealed manual override

无=不带节流器
B0.8=节流孔径0.8
B10=节流孔径1.0
B12=节流孔径1.2
B14=节流孔径1.4
B15=节流孔径1.5
B18=节流孔径1.8
B20=节流孔径2.0
B22=节流孔径2.2
No code=Without
throttle insert
B0.8=Throttle 0.8
B10=Throttle 1.0
B12=Throttle 1.2
B14=Throttle 1.4
B15=Throttle 1.5
B18=Throttle 1.8
B20=Throttle 2.0
B22=Throttle 2.2

无=不带插装单向阀
P=带插装单向阀

No code=Without cartridge
check valves
P=With cartridge check valves

Z5L=带灯大方形插头
Z5L=Large quadrate plug with light

Product link : <https://www.hanshang-hydraulic.com/?p=408155>